

**Product Data Sheet**  
Edition 7.15.2004  
Identification no. I195-65D  
Sika Galvashield CC

## Sika® Galvashield® CC

### Embedded Galvanic Anode for Corrosion Control

#### Description

Sika Galvashield CC embedded galvanic anodes are used to control on-going corrosion and to prevent the initiation of new corrosion activity in concrete structures. Galvashield CC anodes consist of a sacrificial zinc core that is activated by the surrounding specially formulated precast cementitious mortar. The cylindrical anode, available in a variety of standard sizes, is quickly and easily installed into concrete that is mechanically sound but has on-going corrosion activity. Once installed, the zinc core corrodes preferentially to the surrounding rebar, thereby providing galvanic corrosion control to the adjacent reinforcing steel. Custom size anodes are available for specific project needs.

#### Applications

- Balconies
- Columns and beams
- Bridge decks
- Parking garages
- Piers and wharfs


#### Features and Benefits

- **Proven technology** - supported by independent test program.
- **Focused protection** - discrete anodes can be installed to provide corrosion protection in areas with high corrosion potentials or active corrosion.
- **Economical** - save money by only protecting the remaining chloride-contaminated (unrepaired) areas.
- **Versatile** - effective in chloride-contaminated and carbonated concrete. Can be used for both conventionally reinforced and prestressed or post-tensioned concrete.
- **User friendly** - installation is quick and easy.
- **Low maintenance** - requires no external power source or system monitoring.
- **Measurable** - anode performance can be easily monitored if required.
- **Long lasting** - 10 to 20 year service life\* reduces the need for future repairs.

\*As with all galvanic protection systems, service life is dependent upon a number of factors including reinforcing steel density, concrete conductivity, chloride concentration, humidity and anode spacing.


#### Specification

Embedded galvanic anodes shall be Sika Galvashield CC [specify product number, ie. CC65], a pre-manufactured anode consisting of zinc in compliance with ASTM B418-95a Type I cast around an integral bright steel tie wire for making connection to the reinforcing steel and encased in an activated cementitious mortar with pH of 14 or greater. The cementitious mortar shall contain no chlorides or other corrosive constituents detrimental to the reinforcing steel as per ACI 222R.

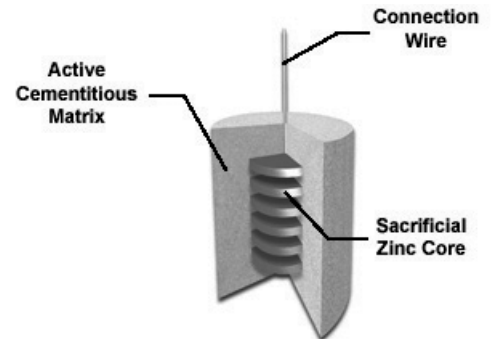


*Cut-away of Sika Galvashield CC*

Level of Protection	Description	Galvashield CC
Corrosion Prevention	Preventing new corrosion activity from initiating	•
Corrosion Control	Significantly reducing or stopping on-going corrosion activity	•
Cathodic Protection	Highest level of protection intended to stop on-going corrosion activity	

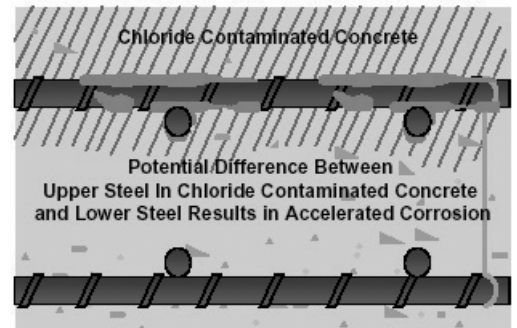

**Corrosion (without Sika Galvashield CC)**

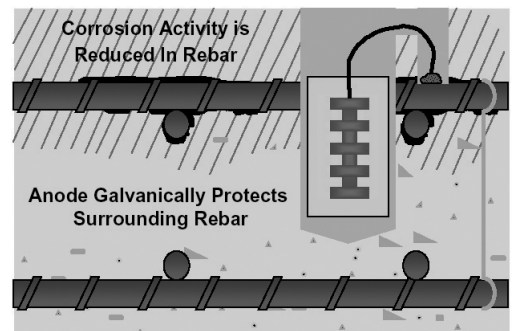

**Sika Galvashield CC reduces corrosion**



# Sika® Galvashield® CC

## How It Works

When two dissimilar metals are coupled together in an electrolyte, the metal with the higher potential for corrosion (more electronegative) will corrode in preference to the more noble metal. In concrete repair applications, the zinc core of the Galvashield CC anode will corrode in favour of the reinforcing steel, thus providing corrosion control to the adjacent reinforcing steel.

## Design Criteria

### Standard Units

Anode Type	Description	Unit Size diameter x length	Minimum Hole Size diameter x depth
Galvashield CC65	Standard unit for moderate steel density	1 ¾ x 2 ½ in. (46 x 62 mm)	2 x 3 ¾ in. (50 x 95 mm)
Galvashield CC100	Larger unit for higher steel density	1 ¾ x 4 in. (46 x 100 mm)	2 x 5 ⅞ in. (50 x 130 mm)
Galvashield CC135	Slim-fit for congested reinforcement	1 ⅞ x 5 ⅜ in. (29 x 135 mm)	1 ¼ x 6 ½ in. (32 x 165 mm)

### Galvashield CC65 and CC135


Steel density ratio (steel surface area/concrete surface area)	Maximum grid dimensions* in. (mm)
< 0.2	28 in. (700 mm)
0.21 - 0.4	24 in. (600 mm)
0.41 - 0.54	20 in. (500 mm)
0.55 - 0.67	18 in. (450 mm)
0.68 - 0.80	16 in. (400 mm)
0.81 - 0.94	15 in. (380 mm)
0.95 - 1.07	14 in. (355 mm)
1.08 - 1.2	13 in. (335 mm)

### Galvashield CC100

Steel density ratio (steel surface area/concrete surface area)	Maximum grid dimensions* in. (mm)
0.55 - 0.94	20 in. (500 mm)
0.95 - 1.17	18 in. (450 mm)
1.18 - 1.41	16 in. (400 mm)
1.42 - 1.64	15 in. (380 mm)
1.65 - 1.88	14 in. (355 mm)
1.89 - 2.11	13 in. (335 mm)

\*Maximum grid dimensions are based on typical conditions. Spacing should be reduced as appropriate for severe environments or to extend the expected service life of the anode.

## Typical layout for series connection

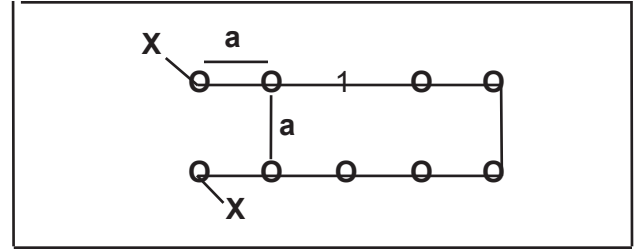

- Galvashield CC units
- X Minimum number of rebar connections
- Interconnecting cable
- a Maximum spacing

## Installation Instructions

The location and spacing of the Galvashield CC anodes shall be on a grid pattern as specified by the engineer. Using a rebar locator, locate all existing steel within the area designated for protection and mark areas to drill anode installation holes. When possible, anodes should be installed a minimum of 4 in. (100 mm) from reinforcing grid.

**Series Connection** - a single circuit shall contain no more than 10 Galvashield CC units. Drill a minimum of two ½ in. (12 mm) rebar connection holes per string of anodes. Saw cut a single continuous groove approximately ¼ in. (6 mm) wide by ½ in. (12 mm) deep into the concrete to interconnect rebar connection holes and anode connection holes.

**Individual Connection** - drill one rebar connection hole per anode location. Saw cut a groove approximately ¼ in. (6 mm) wide by ½ in. (12 mm) deep into the concrete to interconnect the rebar connection hole and anode connection hole.

Reinforcing steel connections should be made using the Galvashield CC Rebar Connection Kit. Place the weighted end of the connector into the drilled hole until the steel coil contacts the reinforcing steel. Feed the steel connector wire through the Galvashield CC Setting Tool and set into place by striking with a hammer. Connect the anode directly to the rebar connection wire using a wire connector. If installing in series, connect the anodes to the interconnecting cable with a wire connector. (Cable and wire connectors are available as the Galvashield CC Anode Connection Kit). Verify continuity between anode locations and rebar connections with a multi-meter. A resistance of 1 ohm or less is acceptable.

Drill holes as per the dimensions listed above to accommodate the anodes. Presoak anodes for a minimum of 10 to a maximum of 30 minutes in a shallow water bath. Galvashield Embedding Mortar should be used to install the still wet anodes into presoaked (saturated-surface dry) holes. Place the mixed embedding mortar into the bottom ⅔ of each hole and slowly press in the anode allowing the mortar to fill the annular space ensuring there are no air voids between the anode and the parent concrete. The minimum anode cover depth shall be ¾ in. (20 mm). Place wires into grooves and top off anode holes and saw cuts flush to the concrete surface with embedding mortar. Embedding mortar should be wet cured or cured with a curing compound and protected from traffic for 24 hours.

Construction



## Sika® Galvashield® CC

### Precautions

Sika Galvashield CC anodes are not intended to address or repair structural damage. Where structural damage exists, consult a structural engineer.

Sika Galvashield CC anodes are designed to provide galvanic corrosion control. Corrosion control products significantly reduce on-going corrosion. Concrete repairs should be completed using Sika Galvashield XP anodes around the boundary of the patch prior to installing Sika Galvashield CC anodes in the remaining unrepaired areas. For more information on corrosion mitigation strategies, contact Sika Corporation.

Caution should be exercised when selecting corrosion mitigation systems for post-tensioned, pre-stressed or otherwise highly stressed steel. Refer to ACI 222.2R for guidance. Furthermore, the system of corrosion protection, controls and monitoring should be designed and managed by specialists who can demonstrate expertise and successful project experience.

### Packaging

Sika Galvashield CC anodes	20 units per box
----------------------------	------------------

### Additional Accessories

Galvashield Embedding Mortar	11 lb. (5.0 kg) bags one bag per 10-20 anodes
Galvashield CC Rebar Connection Kit	20 rebar connectors per box
Galvashield CC Anode Connection Kit	50 ft. (15.2 m) insulated cable 25 wire connectors
Galvashield CC Setting Tool	1 unit per box

### Storage

Store in dry conditions in the original unopened boxes. Avoid extremes of temperature and humidity. Anodes should be installed within one year.

### Health and Safety

As with all cement-based materials, contact with moisture can release alkalis which may be harmful to exposed skin. Galvashield CC and Galvashield Embedding Mortar should be handled with suitable gloves and other personal protective equipment in accordance with standard procedures for handling cementitious materials. Mix left over water from the anode bath with cementitious material and dispose by normal means after hardening. Additional safety information is included in the Material Safety Data Sheet.

### Related Documents

A range of related Galvashield CC documents are available including independent product evaluations, installation instructions, specifications, project histories, applications, price list, MSDS etc. For more information, contact Sika Corporation.

**KEEP CONTAINER TIGHTLY CLOSED • KEEP OUT OF REACH OF CHILDREN • NOT FOR INTERNAL CONSUMPTION • FOR INDUSTRIAL USE ONLY**

All information provided by Sika Corporation ("Sika") concerning Sika products, including but not limited to, any recommendations and advice relating to the application and use of Sika products, is given in good faith based on Sika's current experience and knowledge of its products when properly stored, handled and applied under normal conditions in accordance with Sika's instructions. In practice, the differences in materials, substrates, storage and handling conditions, actual site conditions and other factors outside of Sika's control are such that Sika assumes no liability for the provision of such information, advice, recommendations or instructions related to its products, nor shall any legal relationship be created by or arise from the provision of such information, advice, recommendations or instructions related to its products. The user of the Sika product(s) must test the product(s) for suitability for the intended application and purpose before proceeding with the full application of the product(s). Sika reserves the right to change the properties of its products without notice. All sales of Sika product(s) are subject to its current terms and conditions of sale which are available at [www.sikacorp.com](http://www.sikacorp.com) or by calling 800-933-7452.

**Prior to each use of any Sika product, the user must always read and follow the warnings and instructions on the product's most current Technical Data Sheet, product label and Material Safety Data Sheet which are available online at [www.sikaconstruction.com](http://www.sikaconstruction.com) or by calling Sika's Technical Service Department at 800-933-7452. Nothing contained in any Sika materials relieves the user of the obligation to read and follow the warnings and instruction for each Sika product as set forth in the current Technical Data Sheet, product label and Material Safety Data Sheet prior to product use.**

**LIMITED WARRANTY:** Sika warrants this product for one year from date of installation to be free from manufacturing defects and to meet the technical properties on the current Technical Data Sheet if used as directed within shelf life. User determines suitability of product for intended use and assumes all risks. Buyer's sole remedy shall be limited to the purchase price or replacement of product exclusive of labor or cost of labor. **NO OTHER WARRANTIES EXPRESS OR IMPLIED SHALL APPLY INCLUDING ANY WARRANTY OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE. SIKASHALL NOT BELIEVE UNDER ANY LEGAL THEORY FOR SPECIAL OR CONSEQUENTIAL DAMAGES. SIKASHALL NOT BE RESPONSIBLE FOR THE USE OF THIS PRODUCT IN A MANNER TO INFRINGE ON ANY PATENT OR ANY OTHER INTELLECTUAL PROPERTY RIGHTS HELD BY OTHERS.**

Visit our website at [www.sikaconstruction.com](http://www.sikaconstruction.com) **1-800-933-SIKA NATIONWIDE**  
**Regional Information and Sales Centers.** For the location of your nearest Sika sales office, contact your regional center.

**Sika Corporation**  
 201 Polito Avenue  
 Lyndhurst, NJ 07071  
 Phone: 800-933-7452  
 Fax: 201-933-6225

**Sika Canada Inc.**  
 601 Delmar Avenue  
 Pointe Claire  
 Quebec H9R 4A9  
 Phone: 514-697-2610  
 Fax: 514-694-2792

**Sika Mexicana S.A. de C.V.**  
 Carretera Libre Celaya Km. 8.5  
 Fracc. Industrial Balvanera  
 Corregidora, Queretaro  
 C.P. 76920  
 Phone: 52 442 2385800  
 Fax: 52 442 2250537

Sika is a registered trademarks.  
 Printed in Canada.

